




Category	Commercial Panels
Application	Ancillary, Commercial, Education, Healthcare, Industrial, Retail
Specification	Performance

Pace UGR<19 1200x600

Pace Backlit CCT Multi Wattage 1200x600 Panel UGR<19

Code: APAC1/120/1

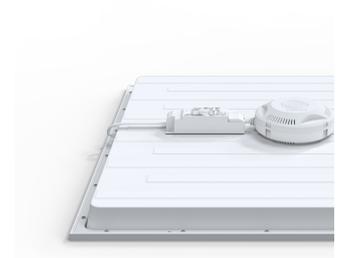

PRODUCT FEATURES

- Backlit LED panel suitable for education, commercial and ancillary area applications
- CCT selectable between 3000K, 4000K and 6500K and power selectable; offering a choice of 2 outputs, in one luminaire
- Dimmable and OCTO options available
- Switch Dim, DALI and 1-10V dimming capability using the multi dimmable driver accessories ADDIM/60/MC
- Slimline design allows for installation into shallow ceiling voids
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- TPa as standard
- Compatible with either the self-test panel pod or the sensor pod

GENERAL INFORMATION

Wattage	46W - 55W
Lumens Delivered	6000lm - 7500lm (4000K)
Lm/W	130lm/W
Beam Angle	90
CRI	80
CCT	3000K, 4000K, 6500K
Input	220-240V
Operating Temp	-20°C to 40°C
SDCM	3
UGR	17
Product Weight without Packaging	4.35 kg

TECHNICAL INFORMATION

Light Source	LED
Colour / Finish	White
IP Rating	IP44
IK Rating	IK02
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lumen Depreciation	L80 60,000h
Warranty (Years)	5
CE Mark	Yes
Height	32 mm





Category	Commercial Panels
Application	Ancillary, Commercial, Education, Healthcare, Industrial, Retail
Specification	Performance

Pace UGR<19 1200x600

Pace Backlit CCT Multi Wattage 1200x600 Panel UGR<19

Code: APAC1/120/1

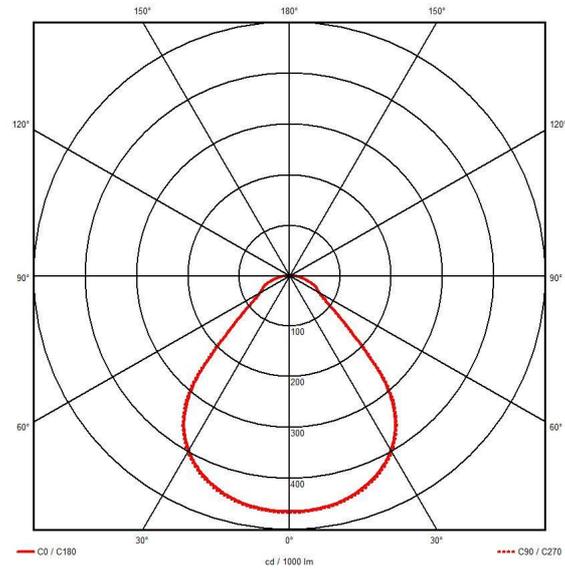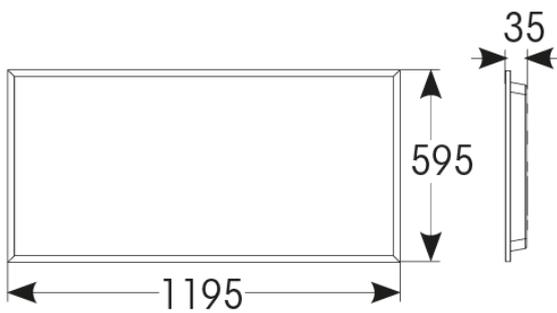

ACCESSORIES

ADDIM/50/MC	Multi-current Dimmable Driver 50W
ADDIM/60/MC	Multi-current Dimmable Driver 60W
ASMF120/2	Surface Mounted Frame 600x1200x80
AIRMLD/POD/3NM/ST	Panel Pod Self-Test Emergency
AIRMLD/POD/MWS	Panel Pod Sensor
APOD/1/3NM/DA	Panel Pod PRO DALI
APRK/120	1200x600 Plasterboard Recessed Kit
APACLED/SK	Pace Backlit Suspension Kit