

**CLASSIC FILAMENT GLS BULB E27 470LM 4.5W 2700K NON-DIMM 300
BEAM FROSTED INTEGRAL**

ILGLSE27NC093

Stock

Clearance



The Classic Full Glass Frosted lamp utilises Filament LED technology to create a decorative look and wide beam angle that looks fantastic in fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

Details

Barcode:	5055788251880
Quick Order Code:	742961
Category:	Lamps
Range Name:	Classic
Product Type:	GLS
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	104
Product Width (mm):	60
Product Weight (g):	30
Material:	Aluminium, Glass
Base Term:	Edison screw
Bulb Base:	E27
Construction:	Glass shell, Filament strip, Aluminium base
Globe Finish:	Frosted
Globe Type:	GLS
Bulb Fixing:	Pendant, Wall, lamp stand, table lamp
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting

Electrical Data

Power (W):	4.5
Power Consumption (W) :	4.5
Power Factor:	0.48
Voltage Range (v):	220-240



Wattage equivalent (W):	40
Amperage (mA):	40
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	40
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	470
Luminous efficacy (lm/W):	104
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature:	2700K - Warm
Colour Temperature Name:	Warm
Beam Angle:	300
Colour Rendering Index (CRI):	80
Compatible Dimmers:	Varilight
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Manufacturer:	Seoul
LED Type:	Filament chip
Lifetime (hours):	15000
Switching Cycles:	50000

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Previous Energy Rating:	A++
New Energy Rating:	E
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

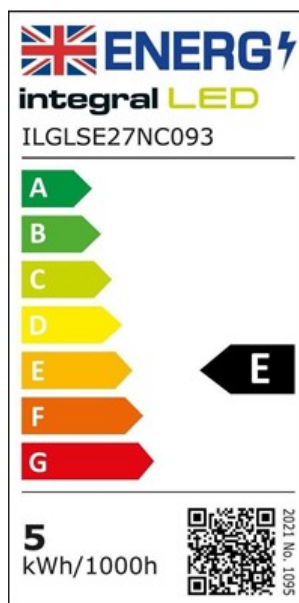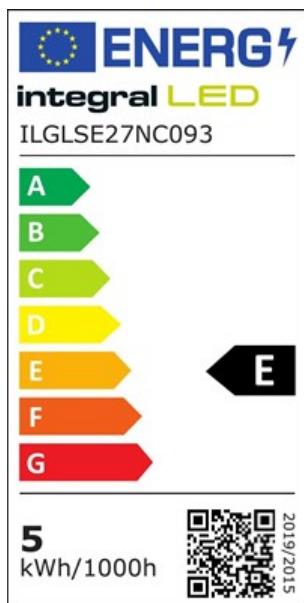

Packaging

Package Weight (g):	60
Package Length (mm):	120
Package Width (mm):	65
Package Depth (mm):	65

[Portal.integral-led.com](https://portal.integral-led.com)